

The future is clean air ... the future is Sourcetec®




- Sourcetec abort damper has a fast acting damper gate release mechanism.
- Damper can be manually or automatically operated.
- Standard damper is equipped with an electrical solenoid 110V/1/60 which needs to be energized for gate release.
- Outlet screen is standard.
- Abort Damper shall be fabricated from heavy gauge reinforced steel.
- Sourcetec abort damper is fully welded and shipped completely assembled.
- Whole assembly is coated with Sourcetec special coating for added protection, color can be customized.

DIMENSIONS & SPECIFICATIONS

Figure 1: Abort Damper

ABORT DAMPER SERIES "AD"

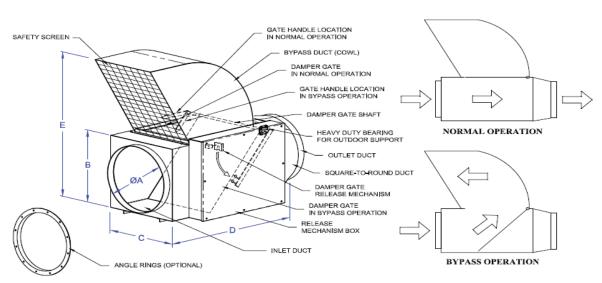

MODEL	ØA IN (mm)	B IN (mm)	C IN (mm)	D IN (mm)	E IN (mm)	WEIGHT LBS (kg) (APPROX)
AD-14	14"	16"	16"	44"	34"	125 lbs.
AD-16	16"	18"	18"	46"	38"	150 lbs.
AD-18	18"	20"	20"	48"	42"	180 lbs.
AD-20	20"	22"	22"	50"	47"	220 lbs.
AD-22	22"	24"	24"	54"	51"	270 lbs.
AD-24	24"	26"	26"	58"	57"	330 lbs.

Table 1: Abort Damner

- Above dimensions are for reference use only. For precise dimensions please consult the factory.



Ontario, Canada, L5S 1E7

Tel: (905) 678-9333 Fax: (905) 678-7133

Ohio, USA 43528

Toll Free: 1-800-784-2383 www.sourcetecindustries.com Distributed by: