




All Sourcetec hose reels are equipped with a special heat resistant rubber exhaust hose, rated to 350° F. For higher temperature applications, a special silicone coated heat resistant hose is available as optional equipment. All of our exhaust hoses are tested under the toughest conditions to ensure our customers are receiving the finest products available.

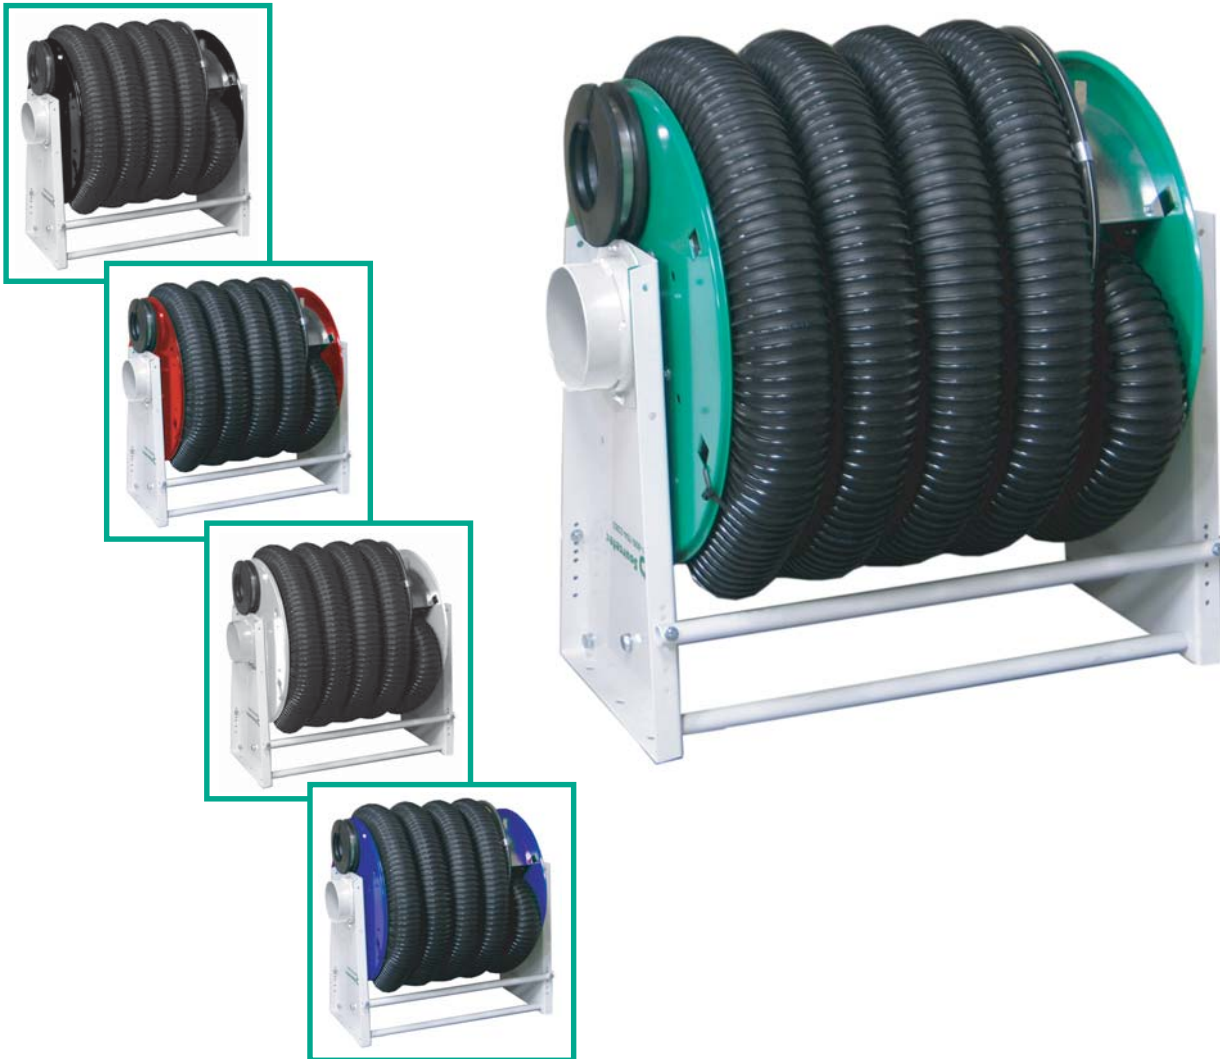

Spring Loaded Model:

As you pull the hose to the desired position the reel locks, holding it securely in place. To rewind the hose, simply pull it further to unlock the reel and let the hose rewind automatically to its storage position.

Winch model also available for restricted applications only.
Contact our engineering department for additional information.

Manual Exhaust Hose Reels "EHR" Series

*The future is clean air ... the future is **Sourcetec**[®]*



Standard Hose Reels with Corresponding Model# and Specifications

Low Temp Hose up to 350° F

HOSE DIA.	HOSE LENGTH (FT)	MODEL#	REMARKS
4	15	EHR415	CARS
4	20	EHR420	CARS
4	25	EHR425	CARS
4	30	EHR430	CARS
4	33	EHR433	CARS
5	15	EHR515	CARS & VANS
5	20	EHR520	CARS & VANS
5	25	EHR525	CARS & VANS
5	30	EHR530	CARS & VANS
5	33	EHR533	CARS & VANS

- Reel equipped with 6" low temperature hose is available only upon request.

High Temp Hose up to 600° F

HOSE DIA.	HOSE LENGTH (FT)	MODEL#	REMARKS
4	15	EHR415H	CARS
4	20	EHR420H	CARS & VANS
4	25	EHR425H	CARS & VANS
4	30	EHR430H	CARS & VANS
4	33	EHR433H	CARS & VANS
5	15	EHR515H	VANS & LIGHT TRUCKS
5	20	EHR520H	VANS & LIGHT TRUCKS
5	25	EHR525H	VANS & LIGHT TRUCKS
5	30	EHR530H	VANS & LIGHT TRUCKS
5	33	EHR533H	VANS & LIGHT TRUCKS
6	15	EHR615H	TRUCKS
6	20	EHR620H	TRUCKS
6	25	EHR625H	TRUCKS
6	30	EHR630H	TRUCKS
6	33	EHR633H	TRUCKS

- For winch operated reel, replace the EHR with HR
- Engineering and dimensional drawings are available upon request.
- Extended reel may be required for hose lengths exceeding 25'

Distributed by:

Sourcetec Industries Inc.
Mississauga, Ontario, Canada
Tel: (905) 678-9333 Fax: (905) 678-7133
Holland, Ohio, USA
1-800-784-2383

www.sourcetecindustries.com
E-mail: sales@sourcetecindustries.com

Accessories

Flexible Hoses

High temperature silicone coated heavy duty rubber hose for extreme heat up to 600° F and 1100° F. A variety of hoses are available for specific applications.

Tail Pipe Adaptors

A tailpipe adaptor should always be placed between the vehicles exhaust pipe and the hose drop for safety and efficiency purposes. Sourcetec provides an endless selection of stock and custom made adaptors from crush proof to heavy duty steel to suit any application.

Motorized Damper Model #R8800

Recommended where several reels are connected to one system to save heat and energy costs.

Various Mounting Assemblies

Our standard reel is equipped with a mounting bracket suitable for fastening to a wall or ceiling. Where direct mount is not possible or reel location is an issue, Sourcetec offers a variety of options such as: extension brackets and swing booms – single or double joints, etc.

Fans for Direct Mount on Reels

Our heavy duty direct drive fans are equipped with a steel housing, an efficient light weight aluminum wheel and are AMCA rated. Standard equipment includes: fan casing, wheel, TEFC motor and a special bracket for reel mounting.


Fans "HRD" Series for direct mount on reels

MODEL #	CFM	SP	HP
HRD-9	330	4"	1/2
HRD-11	600	4"	1
HRD-11-1/2	730	4"	1-1/2
HRD-2	935	4"	2

* check HRD brochure for other models and voltages

Micro Switch - MSF

Factory installed on reel. Allows fan to be switched ON or OFF automatically. Low voltage only - 24V. (Motor starter with transformer are not included).



Motor Control Panel - MCR

Complete control panel with motor starter, low voltage transformer, overload with contactor and terminal blocks factory installed on reel. Operates with MSF.

Sourcetec

The future is clean air ... the future is Sourcetec®

We reserve the right to change specifications without notice. 07/06