



The future is clean air ... the future is Sourcetek®

Extension Booms



DESCRIPTION

We recommend the use of our extension boom if a greater area of coverage is required when using a hose and balancer system, or an exhaust hose reel. A special venting hood can also be suspended from our boom. Our swing booms are available in different sizes, either with a single extension or with an extra joint as an option to provide better flexibility. All Sourcetek booms are made of heavy duty steel and come with a joint at the wall to provide a working radius of 180°.

SPECIFICATIONS

- Wall mounting bracket
- 180° wall joint (mounts to wall bracket). An extra 270° mid joint is optional.
- Solid tube above boom (same size as drop)
- Flexible connection for wall attachment (same size as specifications as drop)
- Flexible connection for mid joint, if required (same size as specifications as drop)
- One 90° solid elbow at end of boom
- “O” ring attachment for hook up
- Extra support if boom is longer than 10 ft.

ACCESSORIES

- Exhaust fan mounted directly on boom
- Ball bearings on all joints
- Clutch or brake mechanism on all joints
- Sliding track on first extension

OPTIONAL EQUIPMENT THAT MAY BE ATTACHED TO THE BOOM

- Solid Tube & Flexible SourceArm®
- Hose Reels (Manual & Motorized)
- Hose & Balancer (SES)
- Custom Made Hoods (Optional Exhaust Drops)

MODEL #'s FOR STANDARD SWING BOOMS

SINGLE-SECTION BOOM

| Model # | Length A | Length B | Max. Reach Ft. |
|---------|----------|----------|----------------|
| EB 50 | 5.0 | 0 | 5.0 |
| EB 75 | 7.5 | 0 | 7.5 |
| EB 100 | 10 | 0 | 10 |
| EB 120 | 12 | 0 | 12 |
| EB 150 | 15 | 0 | 15 |

TWO-SECTION BOOM

| Model # | Length A | Length B | Max. Reach Ft. |
|----------|----------|----------|----------------|
| EB 32 | 3.0 | 2.0 | 5.0 |
| EB 52 | 5.0 | 2.5 | 7.5 |
| EB 55 | 5.0 | 5.0 | 10 |
| EB 84 | 8.0 | 4.0 | 12 |
| EB 105 | 10 | 5.0 | 15 |
| EB 155 | 15 | 5.0 | 20 |
| EB 1010 | 10 | 10 | 20 |
| EB 1510* | 15 | 10 | 25 |

THREE-SECTION BOOM

| Model # | Length A | Length B | Length C | Max. Reach Ft. |
|-------------|----------|----------|----------|----------------|
| EB 131010** | 13 | 10 | 10 | 33 |


*Restrictions apply.

**Weight restrictions may apply. Consult factory.

INQUIRY DETAILS

1. Write the diameter of the tube required directly after the given model #. In most cases, diameter of drop is similar to the tube diameter.
2. Consult factory if the tube diameter exceeds 10".

PHOTOS

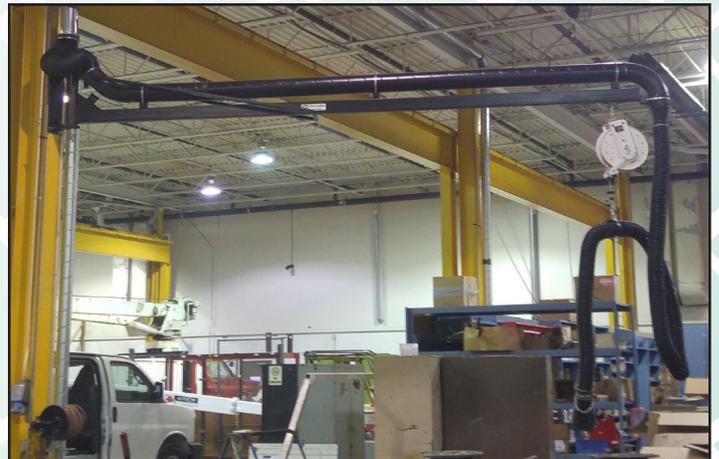

Distributed by:



The future is clean air ... the future is **Sourcetec**®

We reserve the right to change specifications without notice.

Sourcetec Industries Inc.

Ontario, Canada

Tel: (905) 678-9333 Fax: (905) 678-7133

Ohio, USA

1-800-784-2383

www.sourcetecindustries.com

E-mail: sales@sourcetecindustries.com

B-EB 01/18